

Zehnder Kleo Series

zehnder *kleo* KLH, KLHD

zehnder *kleo* KLV, KLVD

zehnder






zehnder kleo KLH, KLHD

zehnder kleo KLV, KLVD

Zehnder Kleo - an elegant alternative to traditional radiators. Zehnder Kleo radiators are produced under the latest quality control measures. Airy, embossed construction in addition to high heat capacity - these are the distinguishing features of this model. Designed for independent heating systems. Ideal for use at low temperature. Models Zehnder Kleo KLV and Zehnder Kleo KLVD are comprised of vertically aligned round tubes welded to round manifold pipes. In

Zehnder Kleo KLH and Zehnder Kleo KLHD models, the round tubes are aligned horizontally. Can be made in single-row or two-row style. Curved and angled shapes. Over 700 colours for you to choose from in the RAL catalogue. Quick and easy installation. Various connection possibilities allow their connection to existing heating systems as well as to brand new ones.

zehnder kleo KLV, KLVD (vertical models)

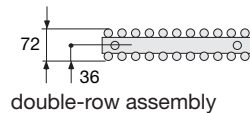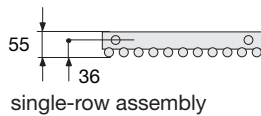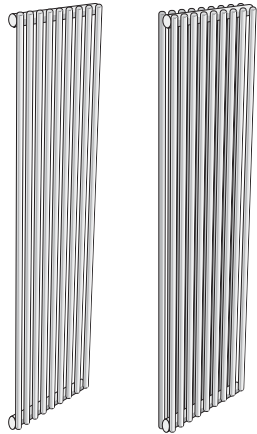




Installation length from 218 to 2957 mm
 Installation height from 500 to 3000 mm
 (standard increment 100 mm, 50 mm increment by request)
 Installation depth from 55 to 72 mm

Installation depth **max. 4.5 bar (5.2 test)**
 Operating temperature **max. 110°C**

Special advantages

- light, translucent, embossed model
- any colour from the Zehnder Group colour chart, other RAL, NCS-S, and sanitary colours
- possible to be made as a partition or as a stand-alone radiator assembly by using mounting feet.
- special assembly: curved and angled models
- excellent appearance by virtue of laser welding
- excellent for use in areas with heightened hygienic requirements


zehnder kleo KLH, KLHD (horizontal models)

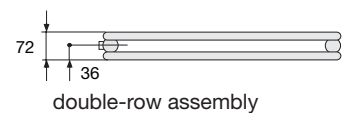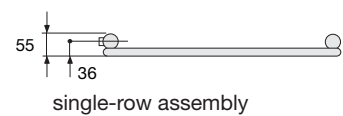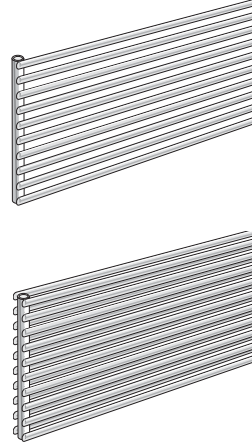


Installation length from 500 to 3000 mm
 (standard increment 100 mm, 50 mm increment by request)
 Installation height from 218 to 2957 mm
 Installation depth from 55 to 72 mm

Operating pressure **max. 4.5 bar (5.2 test)**
 Operating temperature **max. 110°C**

Curved and angled assembly of Zehnder Kleo radiators

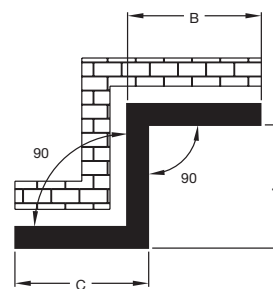

only KLV



only KLH

Zehnder Group
 Export Division
 Information Office
 Almweg 34
 D-77933 Lahr
 Tel. +49 (0) 7821 586 392
 Fax +49 (0) 7821 586 406
 zehnderexport@zehndergroup.com
 www.zehnder.eu

Zehnder Group
 Export Division
 Information Office
 7, rue Jean Mermoz
 F-91031 Evry Cedex
 Tél 33 1 69 36 16 15
 Fax 33 1 69 36 15 33
 export@zehndergroup.com
 www.zehnder.eu

zehnder